


Electrical Specifications	
Frequency Range (MHz)	698-2700
VSWR	≤ 1.3
Insertion Loss (dB)	≤ 0.4
Isolation (dB)	≥ 22
Average Power, Maximum (W)	50
Impedance (Ω)	50

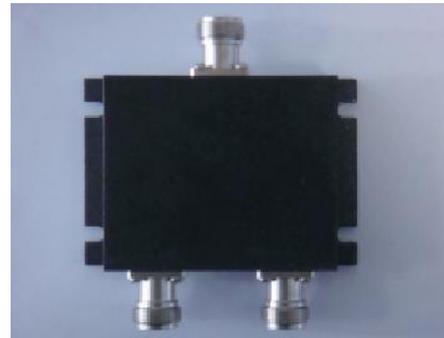

Mechanical Specifications	
Dimensions (mm)	88×60×21
Packing Dimension (mm)	TBA
Net Weight (with installation kit) (kg)	0.25
Application	Indoor
Operating Temperature ($^{\circ}\text{C}$)	-40 to +70
Humidity (%)	5 to 95
Connector	N Female